

COMPACT FLUORESCENT LUMINAIRES



2D Luminaires – Dun Laoghaire Shopping Centre

2D Compact Fluorescent



THORN Lighting's range of compact fluorescent luminaires have been designed to meet the many requirements of the lighting specifier.

Surface luminaires of unobtrusive or distinctive design for modern or traditional interiors that require diffuse or directional lighting for functional or decorative applications.

Recessed luminaires for discreetly effective or decorative lighting.


Outdoor luminaires for amenity or security lighting.

This wide range makes use of the energy efficient 2D lamp which is available in the following sizes; 16W (1050 lm), 28W (2050 lm) and 38W (3050 lm) and is particularly suited to areas where, for various reasons, long periods of lighting are required such as offices, hotels, factories, schools, parks and precincts.





2D OY 16

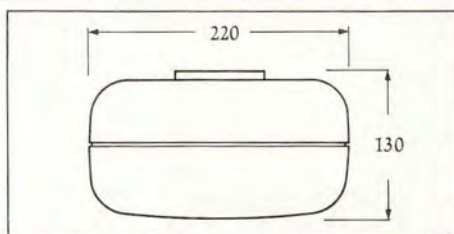


Oyster 16W

A totally enclosed unit for surface mounting. In two-tone polycarbonate with grey body and opal front diffuser – corrosion and vandal-resistant – containing an internal reflector, gear and lampholder. A foam rubber watertight gasket can be fitted at the rear of the luminaire. Packed with a 2D 16W lamp and water-tight gasket. Rated IP23.


RANGE

Cat. No.	Description	Lamp W	Weight kg
2D OY 16	Surface luminaire	16	1.08
2D OY 16 HPF	Surface luminaire High Power Factor	16	1.1

Emergency version is also available see Emergency Lighting section.

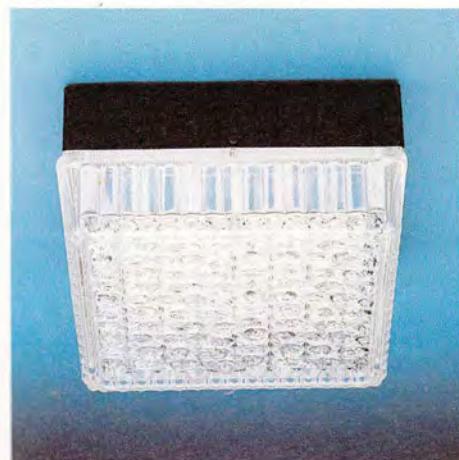

2D XJ 16

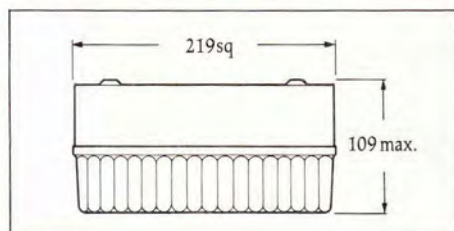

XJ Modern Glass 16W


A ceiling mounted unit of crystal pattern glass supported in black finished metal framing. Packed complete with a 2D 16W lamp.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D XJ 16	Ceiling luminaire	16	3.5
2D XJ 16/HPF	Ceiling luminaire High Power Factor	16	3.52

Emergency version is also available see Emergency Lighting section


2D Outdoor Wedge/Downlights

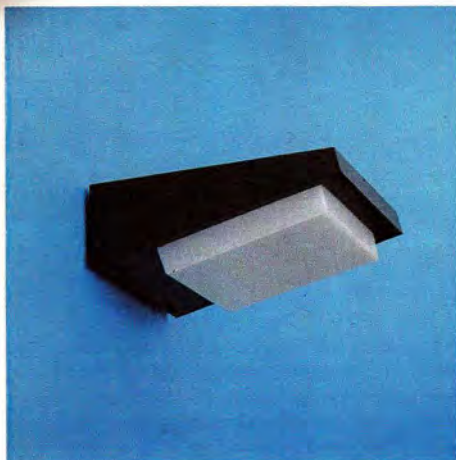

2D OW 16

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D OW 16	Wedge/wall mounting	16	2.5
2D OWP	Pole mounting adaptor	—	0.5

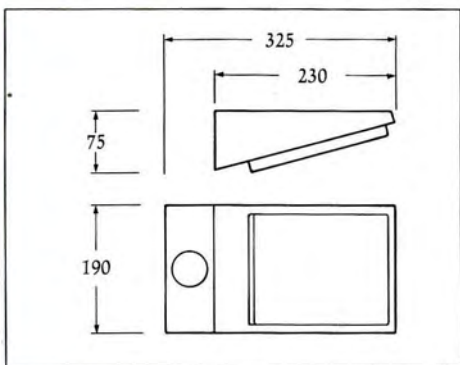

Outdoor Wedge 16W

An outdoor amenity luminaire suitable for wall or pole mounting (pole not supplied). Packed complete with a 2D 16W lamp.

A pole mounting adaptor for 50mm (2 inch) poles is available to support one or two luminaires.




2D DSFR 16



2D DCFR 16

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D DSFR 16	'Square' – fully recessed	16	1.4
2D DCFR 16	'Circular' – fully recessed	16	1.4

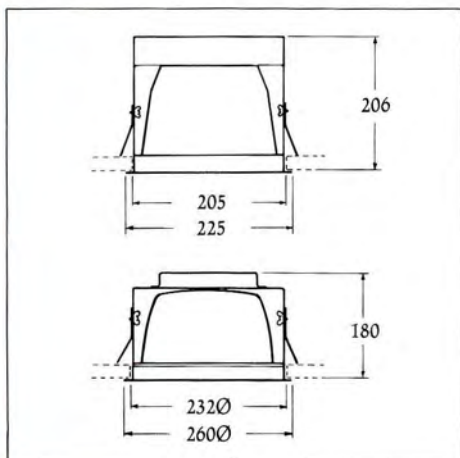


Downlights 16W

Downlights that operate effectively with a 16W lamp are a practical reality with this range of luminaires. All packed complete with a 2D 16W lamp. The range includes square and circular types for recessing.

2D Rondo/Domino



2D RC 16P

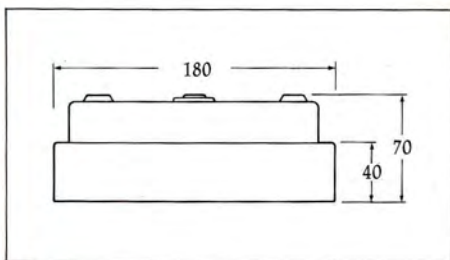

Rondo 16W


Spill ring luminaires allowing light to reflect on the ceiling surface. Metal construction with a white gearbox and brass finish circular trim with prismatic attachment.

Packed complete with a 16W 2D lamp.


Can be ceiling or wall mounted.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D RC 16P	Circular luminaire/ prismatic	16	1.1

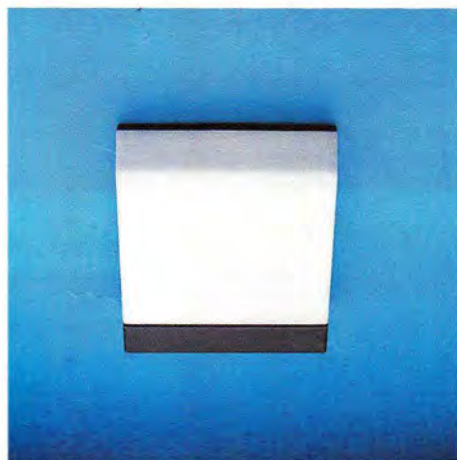

2D DO 16

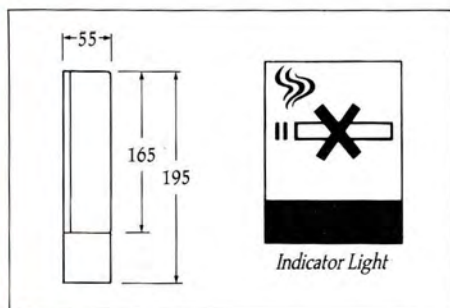

Domino 16W

A slim commercial luminaire with a depth of only 55mm making it very suitable for tight locations. Pairs of luminaires can be fixed together to form a twin design. It can also be used as an indicator by attaching transfers. Packed complete with a 16W 2D lamp.

Can be ceiling or wall mounted.

Note: Transfers not supplied.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D DO 16	Surface luminaire	16	1.4






2D FV 16



2D FV 28



2D FC 16

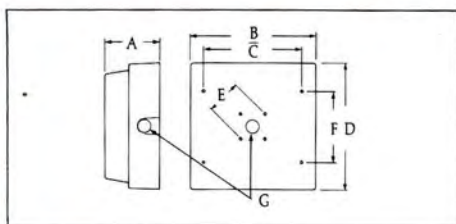

Bulkhead 16W/28W

For internal or external applications with long life and low energy consumption. Has an injection moulded black polycarbonate body and opal diffuser secured by two special retaining screws with a triangular head, (a special key is provided). Packed with 2D lamp. Suitable for wall or ceiling mounting. Complies with BS4533:102.1 (IP65 dustproof and jet proof). A prismatic diffuser version of the Bulkhead 16W is also available, Catalogue number 2D FC 16.

A spare security key is available Catalogue number OBFV. Emergency version of the 2D FV16 is available, see Emergency Lighting section.

Photocell Bulkhead

A 16W Bulkhead with integral photocell which automatically switches on at dusk and off at dawn (Catalogue number 2D FVP 16).

Note:

A wall mounted photocell kit (Catalogue number QPK) is available for automatic control when dusk to dawn operation is required. Each unit which is separately wall mounted will operate up to 1000 watts load (1500VA 240V 50Hz).

DIMENSIONS (mm)


Cat. No.	A	B	C	D	E	F	G (entries)
2D FV 16	85.5	198	160	198	50	100	20
2D FV 28	107	254	190	254	50	190	20

RANGE


Cat. No.	Description	Lamp W	Weight kg
2D FV 16	Bulkhead c/w 16W 2D lamp and gear	16	1.10
2D FV 16 HPF	Bulkhead c/w 16W 2D lamp and HPF gear	16	1.12
2D FV 28	Bulkhead c/w 28W 2D lamp and HPF gear	28	2.4
2D FV B1	Bollard for single 2D bulkhead		
2D FV B2	Bollard for twin 2D bulkhead		
2D FV P16	Bulkhead c/w 16W 2D lamp and gear with integral photocell (LPF only)	16	1.2
2D FC 16	Bulkhead with prismatic diffuser c/w 16W 2D lamp and HPF gear	16	1.12




2D XRC 16

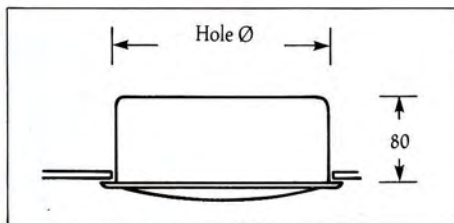

2D XRO 16

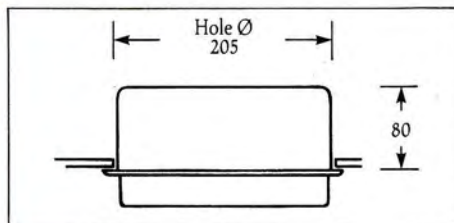

2D XRF 16

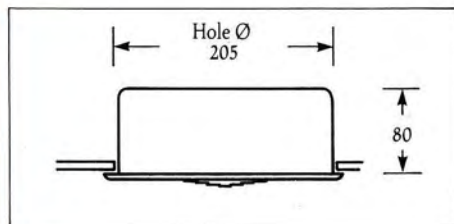

Nova 16W Recessed Range

The recessed range uses a circular body requiring minimal void depth, and providing efficient output. Supplied with a 2D 16W lamp. A chrome plated trim is supplied as standard. However, a brass coloured trim is also available and can be ordered by adding BR to the end of the Catalogue number.

There are options of crystal, opal and fresnel plastic diffusers.

Designed for recessed ceiling mounting.


RANGE

Cat. No.	Description	Housing Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XRC 16	Round/recessed/crystal	2D XR 16	2D XC 16	16	0.90
2D XRO 16	Round/recessed/opal	2D XR 16	2D XO 16	16	0.90
2D XRF 16	Round/recessed/fresnel	2D XR 16	2D XF 16	16	0.90


Note: HPF luminaires can be ordered by adding HPF to the Catalogue number.




2D XSC 16

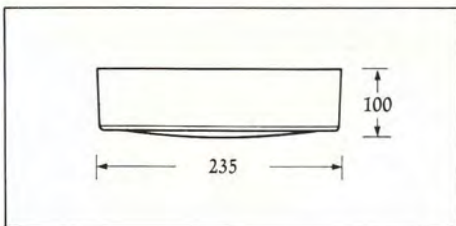

2D XSO 16

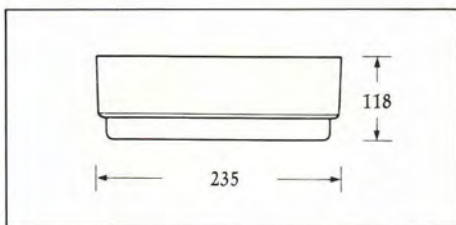

2D XSF 16

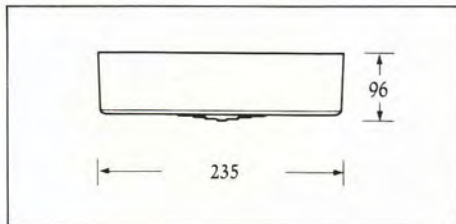

Nova 16W Surface Range

The range consists of a surface mounted housing with white body, supplied with a 2D 16W lamp.

A chrome plated trim is supplied as standard. However, a brass coloured trim is also available and can be ordered by adding BR to the end of the Catalogue number.

There are crystal, opal and fresnel plastic diffuser options. Designed for ceiling mounting.


RANGE

Cat. No.	Description	Housing Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XSC 16	Round/surface/crystal	2D XS 16	2D XC 16	16	1.00
2D XSO 16	Round/surface/opal	2D XS 16	2D XO 16	16	1.00
2D XSF 16	Round/surface/fresnel	2D XS 16	2D XF 16	16	1.00


Note: HPF luminaires can be ordered by adding HPF to the Catalogue number.




2D XRC 28

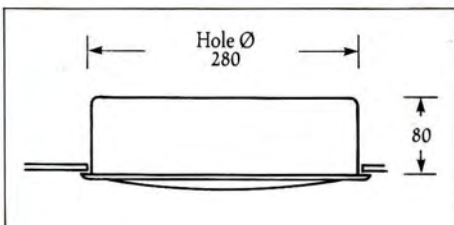

2D XRO 28

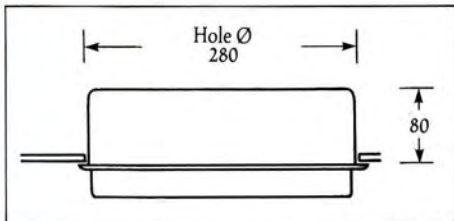

2D XRF 28

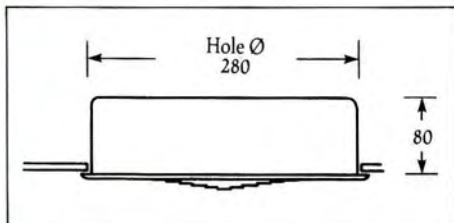

Supernova 28W Recessed Range

The recessed range uses a circular body requiring minimal void depth, and providing efficient output. Supplied with a 2D 28W lamp.

A chrome plated trim is supplied as standard. However, a brass coloured trim is also available and can be ordered by adding BR to the end of the Catalogue number.

There are options of crystal, opal and fresnel plastic diffusers.

RANGE

Cat. No.	Description	Housing Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XRC 28	Round/recessed/crystal	2D XR 28	2D XC 28	28	2.25
2D XRO 28	Round/recessed/opal	2D XR 28	2D XO 28	28	2.15
2D XRF 28	Round/recessed/fresnel	2D XR 28	2D XF 28	28	2.15

Note: Luminaires are HPF as standard.


Designed for recessed ceiling mounting.

Available with 2700K or 3500K lamp.


When ordering specify lamp as suffix: e.g. 2D XRC 28/2700.




2D XSC 28

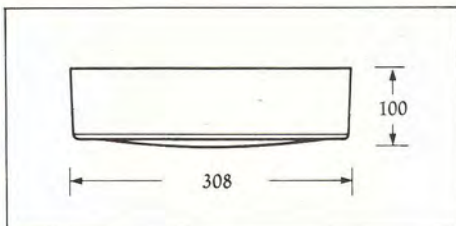

2D XSO 28

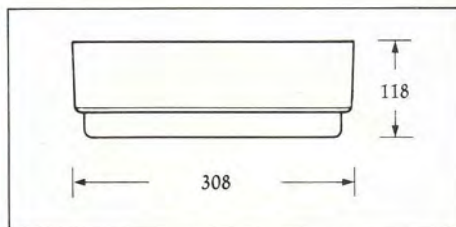

2D XSF 28

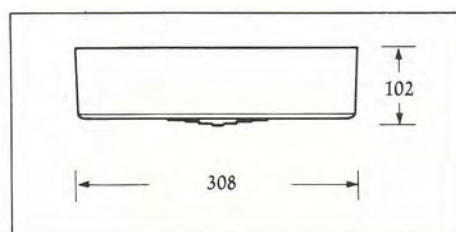

Supernova 28W Surface Range

The range consists of a surface mounted housing with white body, supplied with a 2D 28W lamp.

A chrome plated trim is supplied as standard. However, a brass coloured trim is also available and can be ordered by adding BR to the end of the catalogue number.

There are crystal, opal and fresnel plastic diffuser options.

Designed for ceiling mounting.

Available with 2700K or 3500K lamp.

When ordering specify lamp as suffix e.g. 2D XSC 28/2700.


RANGE

Cat. No.	Description	Housing Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XSC 28	Round/surface/crystal	2D XS 28	2D XC 28	28	2.25
2D XSO 28	Round/surface/opal	2D XS 28	2D XO 28	28	2.25
2D XSF 28	Round/surface/fresnel	2D XS 28	2D XF 28	28	2.25



Note: Luminaires are HPF as standard.




2D XBM 16

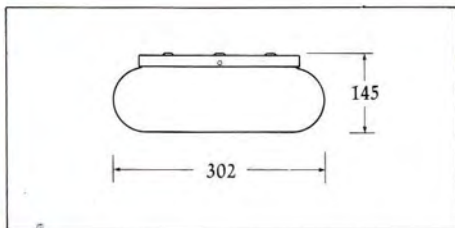

2D XBN 16

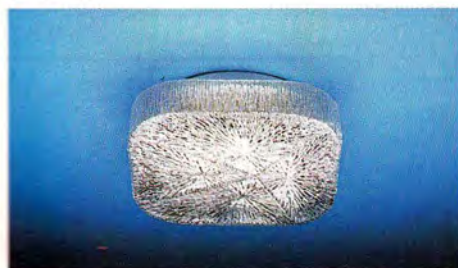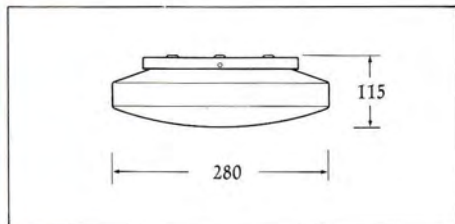

2D XBD 16

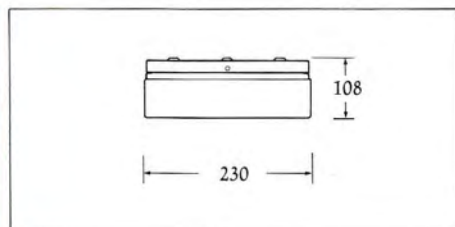

Nova Glassware 16W

The range has two profiled opal attachments and one crystal glass. They are attached to the white gallery by 4 screw fixing.


Can be ceiling or wall mounted.

Supplied complete with a 2D 16W lamp.


RANGE

Cat. No.	Description	Gallery Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XBM 16	Rounded opal + 16W gallery	2D XB 16	2D XM 16	16	1.6
2D XBN 16	Profiled opal + 16W gallery	2D XB 16	2D XN 16	16	1.6
2D XBD 16	Decorative crystal glass + 16W gallery	2D XB 16	2D XD 16	16	1.6


Note: HPF luminaires can be ordered by adding HPF to the Catalogue number.

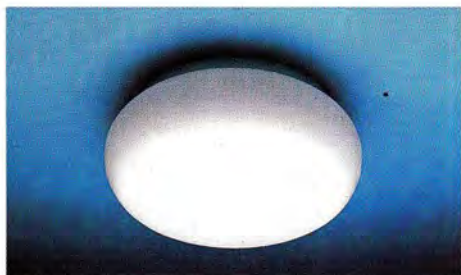


2D XBM

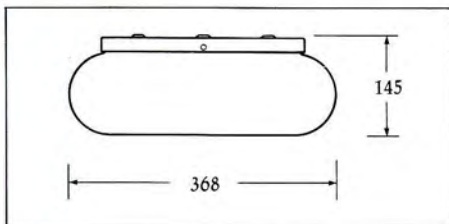

2D XBN

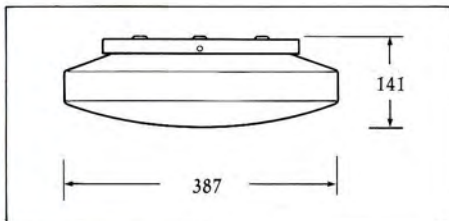

2D XBD

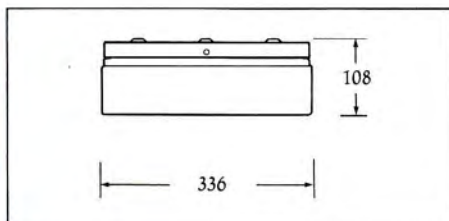

Supernova Glassware 28W/38W

This range has two profiled opal attachments and one crystal glass attachment.

They are attached to the white gallery by a 4 screw fixing.

This gallery is suitable for surface mounting and is available

in both 28W and 38W versions using the same attachments. The 28W version is available with a 2700K or 3500K 2D lamp. When ordering specify lamp as a suffix e.g. 2D XBM 28/2700.

The 38W lamp is 3500K as standard.

RANGE

Cat. No.	Description	Gallery Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D XBM 28	Rounded opal + 28W gallery	2D XB 28	2D XM 28	28	2.5
2D XBN 28	Profiled opal + 28W gallery	2D XB 28	2D XN 28	28	2.5
2D XBD 28	Decorative crystal glass + 28W gallery	2D XB 28	2D XD 28	28	2.5
2D XBM 38	Rounded opal + 38W gallery	2D XB 38	2D XM 28	38	2.5
2D XBN 38	Profiled opal + 38W gallery	2D XB 38	2D XN 28	38	2.5
2D XBD 38	Decorative crystal glass + 38W gallery	2D XB 38	2D XD 28	38	2.5


Note: Luminaires are HPF as standard.



2D UNO 16



2D UNP 16

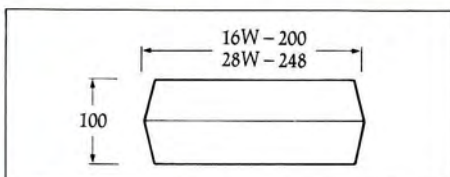

Unilite Square 16W/28W

An all purpose interior luminaire, moulded in vandal resistant polycarbonate. The black base is supplied with a choice of diffuser, opal or prismatic. Suitable for wall or ceiling mounting.

Note: the 2D Unilite 28W is available with 2700K or 3500K lamp. When ordering specify lamp as suffix, e.g. 2D UNO 28/3500.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D UNO 16	Square opal	16	1.2
2D UNO 16 HPF	Square opal, High Power Factor	16	1.22
2D UNP 16	Square prismatic	16	1.2
2D UNP 16 HPF	Square prismatic, High Power Factor	16	1.22
2D UNO 28	Square opal	28	2.2
2D UNP 28	Square prismatic	28	2.2


Note: 28W luminaires are HPF as standard.



2D URO 16



2D URP 16

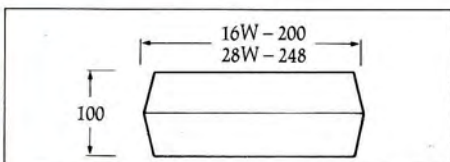

Unilite Round 16W/28W/38W

An all purpose interior luminaire, moulded in vandal resistant polycarbonate. The black base is supplied with a choice of diffuser, opal or prismatic. Suitable for wall or ceiling mounting.

All fittings are supplied complete with lamp.

RANGE

Cat. No.	Description	Lamp watts	Weight kg
2D URO 16	Round opal	16	1.2
2D URO 16 HPF	Round opal, High Power Factor	16	1.22
2D URP 16	Round prismatic	16	1.2
2D URP 16 HPF	Round prismatic, High Power Factor	16	1.22
2D URO 28	Round opal	28	2.2
2D URP 28	Round prismatic	28	2.2
2D URO 38	Round opal	38	2.2
2D URP 38	Round prismatic	38	2.2

Note: 28W/38W luminaires are HPF as standard.




2D CL 16W



2D CL 16BR



2D CL 16R

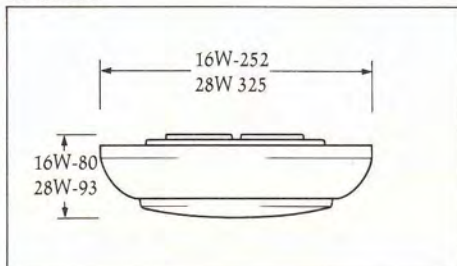

Club 16W and Super Club 28W

A slim, tough plastic luminaire, the Club 16W is fitted with a glass diffuser; the Super Club 28W uses a matching plastic diffuser.

The red and white versions are weather-proof (IP54 splash-proof), however the brass version is for interior application only. The Club is available with the 2D 2700K lamp only, and is switch start.

All luminaires are supplied with 2D lamp.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D CL 16 W	Surface fitting, White	16	1.4
2D CL 16 R	Surface fitting, Red	16	1.4
2D CL 16 BR	Surface fitting, Brass (interior use only)	16	1.4
2D CL 28 W	Surface fitting, White	28	1.77
2D CL 28 R	Surface fitting, Red	28	1.77
2D CL 28 BR	Surface fitting, Brass (interior use only)	28	1.77

Note: 28W luminaires are HPF as standard.




2D DMO 28R



2D DM 28BN



2D DMO 28W

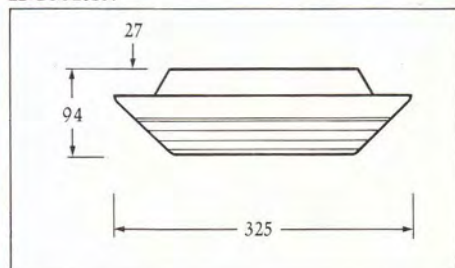

Diamond 28W

An attractive surface luminaire of robust construction to suit today's commercial environment. Constructed of polycarbonate, this Class II IP42 fitting incorporates the

28W 3500K 2D lamp. Available with clear or opal diffusers providing high light output or soft diffuse illumination and three body colours – Brown, Red and White.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D DM 28 W	White surface with clear diffuser	28	2.6
2D DM 28 R	Red surface with clear diffuser	28	2.6
2D DM 28 BN	Brown surface with clear diffuser	28	2.6
2D DMO 28 W	White surface with opal diffuser	28	2.6
2D DMO 28 R	Red surface with opal diffuser	28	2.6
2D DMO 28 BN	Brown surface with opal diffuser	28	2.6

Note: Luminaire is HPF as standard.




2D CYO 28B



2D CY 28W



2D CY28B, CYA B

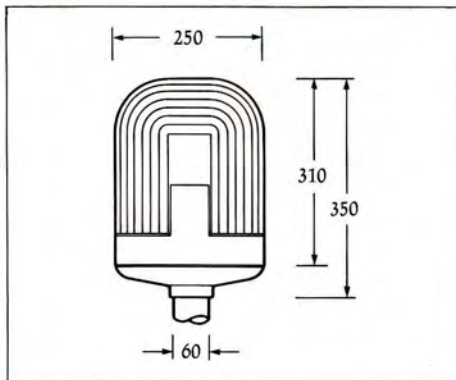

City 28W

An elegant, vandal resistant, polycarbonate luminaire for interior or exterior application. Ideal for use in gardens, pathways, porches and stairways. Rates at IP65 i.e. dust proof and water jet proof. Available in opal and clear diffusers. Body colours black, white and green with co-ordinated adaptor and pole. Suitable for wall or pole mounting.

Incorporates 28W 2D 2700K lamp.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D CYO 28 W	White luminaire with opal diffuser	28	2.35
2D CYO 28 GN	Green luminaire with opal diffuser	28	2.35
2D CYO 28 B	Black luminaire with opal diffuser	28	2.35
2D CY 28 W	White luminaire with clear diffuser	28	2.35
2D CY 28 GN	Green luminaire with clear diffuser	28	2.35
2D CY 28 B	Black luminaire with clear diffuser	28	2.35

Note: Luminaire is LPF only.


ATTACHMENTS

60mm pole adaptor	Description	60mm Fibre-glass pole	Description
2D CYA W	White pole adaptor	2D CYP W	White 1.2m pole
2D CYA GN	Green pole adaptor		
2D CYA B	Black pole adaptor	2D CYP B	Black 1.2mm pole

2D SP/Adaptor



2D SP 16

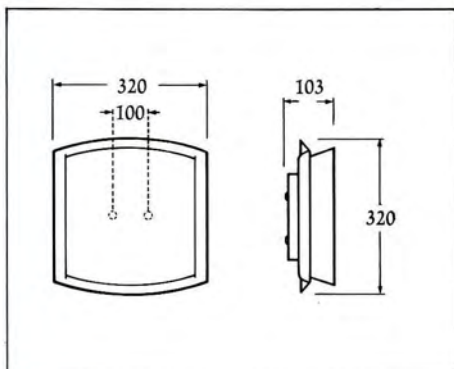

SP 16/28W


A modern interior wall light, its finely perforated white diffusing screen gives a subtle suggestion of the lamp outline. Available in two sizes: 16W or 28W.

Supplied complete with a 2D 16W or 2D 28W 2700K lamp.


RANGE

Cat. No.	Description	Lamp W	Weight kg
2D SP 16	White wall light	16	2.1
2D SP 28	White wall light	28	2.4

Note: the 2D SP 28 is HPF as standard.

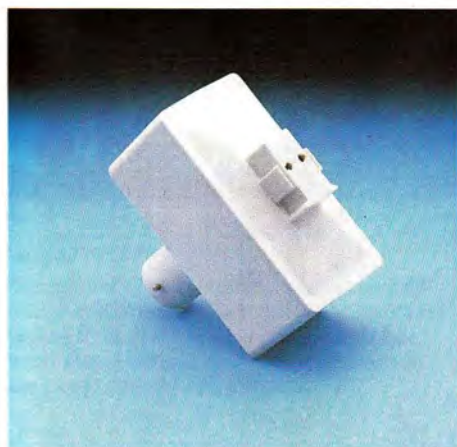

2D A 16

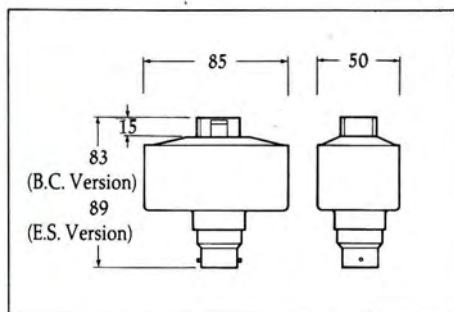

Adaptor 16W



This adaptor allows immediate conversion of existing BC or ES sockets to THORN 2D. It is plugged into the existing lampholder socket and can then accept the 2D lamp. Packed complete with a 2D 16W lamp this adaptor is the ideal method of converting existing GLS luminaires.

RANGE

Cat. No.	Description	Lamp W	Weight kg
2D A 16	Adaptor/BC	16	0.5
2D A 16ES	Adaptor/ES	16	0.5



2D BSO 28




2D BSC 28

RANGE

Cat. No.	Description	Gallery Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete fitting
2D BSO 28	Batten/opal	2D B 28	2D SO 28	28	2.55
2D BSC 28	Batten/crystal	2D B 28	2D SC 28	28	2.55

Note: Luminaires are HPF as standard.

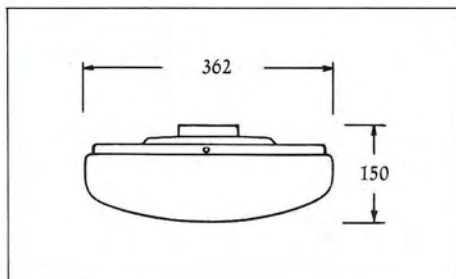


Domus 28W

The attractive opal acrylic and striated glass bowl, are fixed to the reflector on a plastic gearbox. There is a pattress supplied for ceiling mounting. Packed complete with 2D 28W 2700K lamp.



16W and 28W Conversion Pack

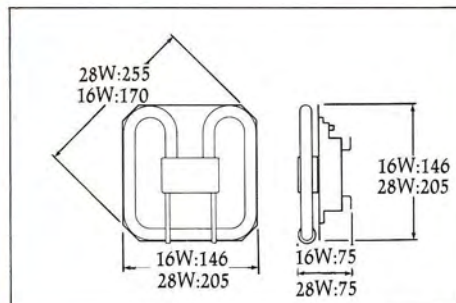

Conversion Pack 16W/28W

The conversion pack is for converting existing GLS luminaires to 2D to reduce energy and maintenance costs. The reflector plate ensures efficient operation and houses the gear and terminals.

Packed complete with 2D lamp.

RANGE


Cat. No.	Description	Lamp W	Weight kg
2D CP 16	16W conversion pack	16	0.75
2D CP 16/HPF	16W conversion pack High Power Factor	16	0.77
2D CP 28	28W conversion pack High Power Factor	28	1.35





2D SFP



2D SFL

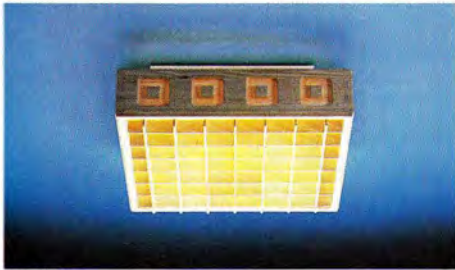

2D SFW

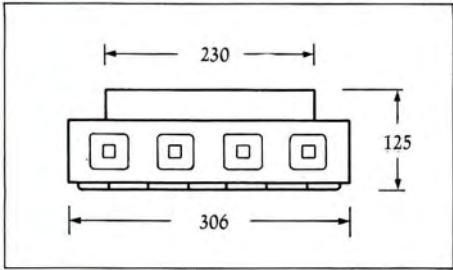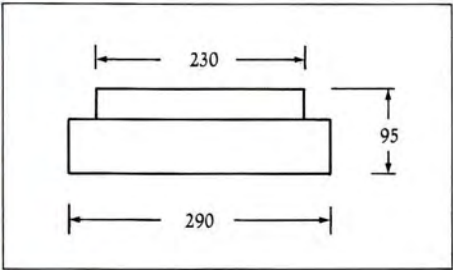

Facet 28W/38W

The range of attachments of either prismatic or parabolic louvre in a white frame or a timber louvre in a timber frame make the 2D Facet ideal for many commercial interiors. Attachments are held by a white gearbox complete with lamp so as to allow upward spill light.

Designed for ceiling mounting.
The 2D Facet is available in 28W 2700K or 3500K and 38W 3500K versions. When ordering 28W luminaires specify the lamp as a suffix e.g. 2D SFP 28/2700.

RANGE

Cat. No.	Description	Gear Box Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete luminaire
2D SFP 28	Square/prismatic	2D S 28	2D SFP	28	1.85
2D SFL 28	Square/parabolic louvre	2D S 28	2D SFL	28	1.90
2D SFW 28	Square/timber louvre	2D S 28	2D SFW	28	1.75
2D SFP 38	Square/prismatic	2D S 38	2D SFP	38	1.85
2D SFL 38	Square/parabolic louvre	2D S 38	2D SFL	38	1.90
2D SFW 38	Square/timber louvre	2D S 38	2D SFW	38	1.75

Note: Luminaires are HPF as standard.




2D YS 28/3500



2D YSL 28/3500



2D YSD 28/3500

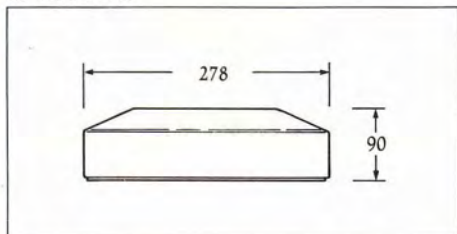

Surface Hyform 28W

This range of high performance luminaires for ceiling mounting incorporates the 28W 3500K 2D lamp. The basic body complete with lamp is available with a choice of two clip-on attachments; a low brightness louvre or a lens controller.

The luminaire is supplied complete with a 28W 3500K 2D lamp.


RANGE

Cat. No.	Description	Body Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete luminaire
2D YS 28/3500	Surface with performance reflector	2D YS 28/3500	—	28	2.3
2D YSD 28/3500	Surface and Lens controller	2D YS 28/3500	2D YD	28	2.51
2D YSL 28/3500	Surface and low brightness louvre	2D YS 28/3500	2D YL	28	2.52

Note: Luminaires are HPF as standard.




2D YR

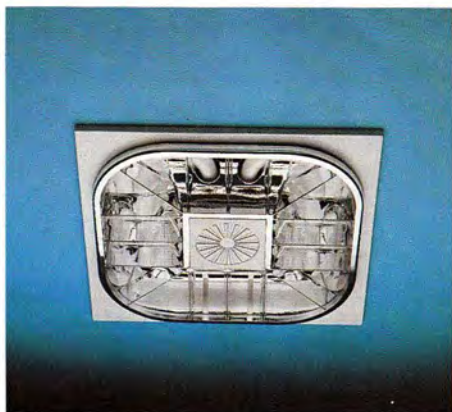

2D YRL



2D YRD

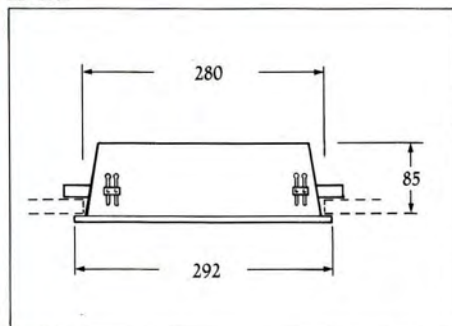

Recessed Hyform 28W/38W

This stylish high performance recessed luminaire is available in both 28W and 38W versions. There is a choice of two clip-on attachments a low brightness louvre or a lens controller.

The luminaire is supplied complete with a 28W or 38W 3500K lamp.

RANGE

Cat. No.	Description	Body Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete luminaire
2D YR 28/3500	Recessed with performance reflector	2D YR 28/3500	—	28	2.3
2D YRD 28/3500	Recessed and lens controller	2D YR 28/3500	2D YD	28	2.51
2D YRL 28/3500	Recessed and low brightness louvre	2D YR 28/3500	2D YL	28	2.52
2D YR 38/3500	Recessed with performance reflector	2D YR 38/3500	—	38	2.3
2D YRD 38/3500	Recessed and Lens controller	2D YR 38/3500	2D YD	38	2.51
2D YRL 38/3500	Recessed and low brightness louvre	2D YR 38/3500	2D YL	38	2.52

Note: Luminaires are HPF as standard.



2D TRP 38




2D TRK 38



2D TRE 38



2D TRO 38

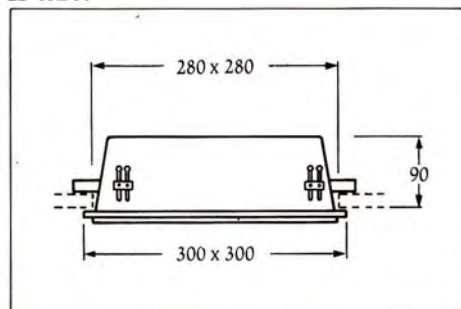

Matrix 38W

A 38W recessed luminaire for use in a wide range of commercial applications. The basic body incorporates the 38W 3500K 2D lamp and is available with a choice of seven aperture treatments; these are a prismatic or opal panel, a square louvre and a conic louvre in silver or gold and a decorative white cell.

RANGE

Cat. No.	Description	Body Cat. No.	Attachment Cat. No.	Lamp W	Weight kg complete luminaire
2D TRP 38	Recessed 38W body & prismatic panel	2D TR 38	2D TP	38	2.35
2D TRO 38	Recessed 38W body & opal panel	2D TR 38	2D TO	38	2.40
2D TRE 38	Recessed 38W body & silver square louvre	2D TR 38	2D TE	38	2.50
2D TRF 38	Recessed 38W body & gold square louvre	2D TR 38	2D TF	38	2.50
2D TRL 38	Recessed 38W body & silver conic louvre	2D TR 38	2D TL	38	2.50
2D TRK 38	Recessed 38W body & gold conic louvre	2D TR 38	2D TK	38	2.50
2D TRC 38	Recessed 38W body & white cell louvre	2D TR 38	2D TC	38	2.40

Note: Luminaire HPF as standard.

BALLASTS

Cat. No.	Description
GCS 16	16W 2D ballast
GCS 28	28W 2D ballast
GCS 36/40	38W 2D ballast

CAPACITORS

Cat. No.	Description
GC 2286/PW	16W 2D capacitor
GC 2428	28W/38W 2D capacitor

STARTERS

Cat. No.	Description
155/500	28W/38W 2 pin glow starter
GA 5109 X	Starter socket
GC 69577.4	28W/38W Vivatronic starter

LAMPHOLDER

Cat. No.	Description
GB 1664, 1684	16W 2 pin lampholder
GB 1669	16W 2 pin pendant lampholder
GB 1685, 1690	28W/38W 4 pin lampholder

DIFFUSERS

Cat. No.	Description
2D OOD	Oyster opal diffuser
2D XJG 2040	XJ glass
2D OWD	Wedge opal diffuser
2D RCP	Rondo prismatic controller
2D DOD	Domino opal diffuser
2D FVD 16	16W Bulkhead opal diffuser
2D FVD 28	28W Bulkhead opal diffuser
2D FCD	16W Bulkhead prismatic diffuser
2D UNOD 16	16W Unilite opal diffuser
2D UNPD 16	16W Unilite prismatic diffuser
2D UNOD 28	28W Unilite opal diffuser
2D UNPD 28	28W Unilite prismatic diffuser
2D SPD	SP perforated shade
2D CLD 16	Club opal diffuser
2D CLD 28	Superclub opal
2D CY	City clear diffuser
2D CYO	City opal diffuser
2D DM	Diamond clear diffuser
2D DMO	Diamond opal diffuser

MISCELLANEOUS

Cat. No.	Description
2D XXC 16	Nova surface collar
2D XXC 28	Supernova surface collar
2D XX 16	Nova chrome trim
2D XX 28	Supernova chrome trim
2D XX 16 BR	Nova brass trim
2D XX 28 BR	Supernova brass trim
2D CLC 16W	Club collar white
2D CLC 16R	Club collar red
2D CLC 16BR	Club collar brass
2D CLC 28W	Super Club collar white
2D CLC 28R	Super Club collar red
2D CLC 28BR	Super Club collar brass





Maxims – Hong Kong