

# WELL-GLASS FITTINGS

## 40-100 WATT LAMPS

### Application

Weatherproof fittings having many general-purpose uses in industrial and commercial situations.



F 64213



F 64212

Cat. No.	Osram lamp	Holder	Dimensions				Weight	
			A		B			
F 64212	watts		in.	mm.	in.	mm.	lb. oz.	kg.
F 64213	40-60	B.C.	8	203	5 $\frac{1}{4}$	133	1 12	0.8
*F 64214	60-100	or	9	229	6 $\frac{3}{4}$	171	3 4	1.5
	60-100	E.S.	9	229	9	229	5 0	2.3


\*With reflector

### Specification

All the metalwork in these fittings is of cast iron, galvanised outside and white stove-enamelled inside. They are fitted with swing bolts and supplied complete with clear well-glasses, rubber gaskets, and B.C. lampholders.


### Fixing

The top entry is tapped  $\frac{3}{4}$  in. (19 mm.) E.T.

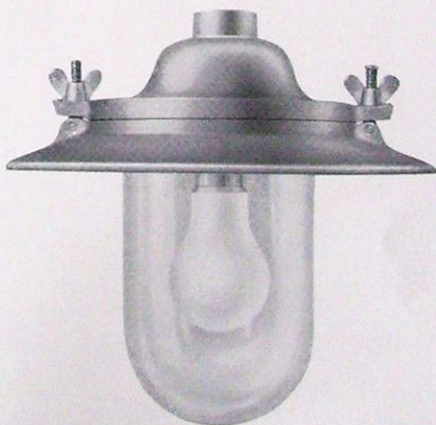

F 64214

**S.E.C.**





Cat. No.	Osram lamp	Holder	Dimensions				Weight	
			A		B			
	WATTS		in.	mm.	in.	mm.	lb. oz.	kg.
F 64216	40-60	B.C. or E.S.	8	203	7 1/4	191	2 12	1.3
F 64217	40-60	B.C. or E.S.	8 1/2	216	5	127	3 0	1.4
F 64218	*150-200	E.S.	13 1/2	343	18	457	11 12	5.3

\* Also suitable for one 80 or 125 watt Osram mercury lamp if fitted with a 3-pin B.C. holder.



F 64216



F 64217



F 64218

## WELL-GLASS FITTINGS

### 40-200 WATT LAMPS

#### Application

Weatherproof fittings having many general-purpose uses in industrial and commercial situations.

#### Specification


All the metalwork in these fittings is of cast iron, galvanised outside, and white stove-enamelled inside. They are each fitted with a clear well-glass, rubber gasket, and a B.C. or E.S. lampholder. Fittings F 64216 and F 64218 are fitted with reflectors.

#### Fixing

F 64216 } The top entry is tapped 3/4 in. (19 mm.) E.T.  
F 64218 }  
F 64217 } Suitable for fixing to small B.S. box.

#### Accessories

Galvanised wire guard for F 64218 - order as F 66010.



**G.E.C.**