




Installation and Wiring Instructions for 2D DOMINO 2DD016

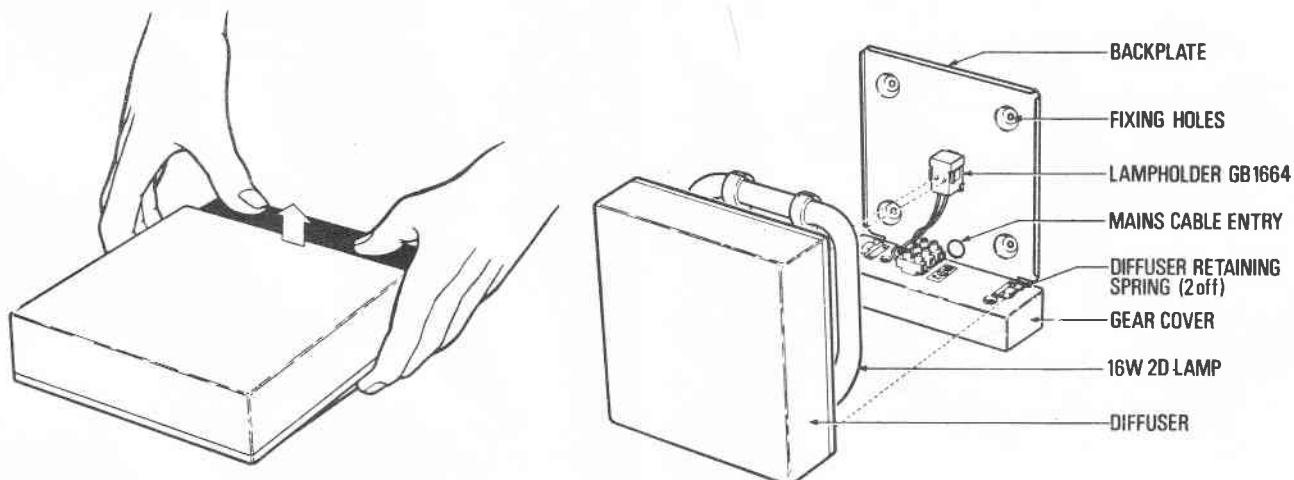

DESCRIPTION

2D Domino - 2D DO I6 c/w 16W 2D lamp.

IMPORTANT

Ensure that electrical supply is turned off before connecting the fitting to the supply.

FIXING DETAILS

1. Remove diffuser — prise off as shown in illustration.
2. Pass mains supply through the backplate and secure the back plate to the fixing surface using the screw holes provided.
3. Fix mains cables to the appropriate terminals i.e. L (brown), N (blue) and earth (green & yellow).
4. Fix 2D lamp in position.
5. Replace diffuser.

OPERATING CONDITIONS

Suitable for use in warm dry atmospheres.

COUNTRY OF ORIGIN

United Kingdom

CHANGES OF SPECIFICATION

The right is reserved to change specifications without prior notifications or public announcement.

IMPORTANT NOTES

1. Ensure that the rated voltage of the luminaire is compatible with the mains supply.
2. Observe the correct polarity when making connection to the mains supply.
3. Ensure that Class 1 luminaires are effectively earthed. NOTE: The earthing connection should normally be made before the live and neutral connections are effected.
4. Ensure the luminaires are suitably rated for the environmental conditions in which they are to be operated.

NOTE: 2D lamps are NOT suitable for dimming on any manufacturer's dimmer.